

FM276W

Strainers

PN16

FM276W




Features & Benefits

- Crane strainers will help eliminate the problems caused by foreign matter within piping systems
- WRAS approved internal and external epoxy powder coating
- WRAS approved gasket

Materials

PART	MATERIAL	SPECIFICATION
Body	Cast Iron	BS EN 1561 EN-GJL-250
Cap	Cast Iron	BS EN 1561 EN-GJL-250
Gasket	Asbestos Free	
Stud	Steel	BS 4439 GRADE 8.8
Nut	Steel	BS 3692 GRADE 8
Screen Hole Size Ø1.5mm 32% Open Ratio	Stainless Steel	Type 304
Drain Plug	Malleable Iron	
Test Point Plug Rc 1/4	Malleable Iron	

Dimensional Drawing

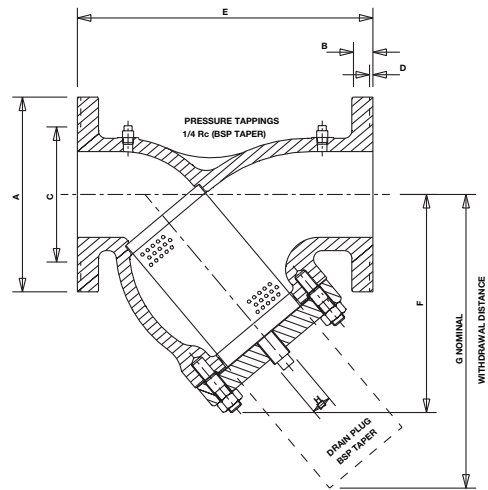

Dimensions & Weights

SIZE (DN)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (Rc)	WEIGHT (kg)
65	185	20	122	3	290	210	298	1 1/4"	18
80	200	22	138	3	310	215	301	1 1/4"	21
100	220	24	158	3	350	245	350	1 1/4"	32
125	250	26	188	3	400	297	430	1 1/2"	46
150	285	26	212	3	480	333	484	1 1/2"	62

Pressure/Temperature Ratings

TEMPERATURE (°C)	-10 to 85
PRESSURE (BAR)	16

END CONNECTION: Flanged to BS EN 1092-2 PN16

SPECIFICATION: End flanges conform to BS EN 1092-2 PN16 Section 3.2 table 11 with raised face and are normally supplied drilled.

Strainers are normally supplied with a stainless steel perforated strainer element having 1.5mm diameter holes.

This product is not suitable for use on Group 2 liquids only, as defined by the Pressure Equipment Directive 2014/68/EU.*

Bosses drilled, tapped and plugged.

*see Quality Assurance page for more information

Valid as of 210524

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Crane Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.